



NT 75/1 Me Ec H Z22

The TÜV tested safety vacuum cleaner NT 75/1 Me Ec H Z22 is a more robust, single engine wet and dry vacuum cleaner for explosive dust (hazard class zone 22) with continuous anti-static system.



1 Zone 22 + dust class H

- For combustible dusts in dust explosion classes, zone 22 and health-endangering dusts, dust class H.

3 Brushless EC drive

- The brushless EC drive has a life expectancy of 5000 hours - ideal for continuous use.

2 Antistatic system

- All Kärcher safety vacuum cleaners feature a continuous antistatic system with conductive accessories.



NT 75/1 Me Ec H Z22

- Brushless EC drive (5000 h)
- Antistatic system
- Suitable for asbestos

Technical data

Order Number	1.667-239.0	
EAN code	4039784538115	
Current type	V / Hz	220 - 240 / 50 - 60
Air flow	l/s	61
Vacuum	mbar / kPa	220 / 22
Container capacity	l	75
Max. rated input power	W	1000
Standard nominal size	DN 40	
Cable length	m	10
Sound level	dB(A)	76
Weight	kg	27,8
Dimensions (L x W x H)	mm	640 × 540 × 925

Equipment

Suction hose	m	4 / with manifold (electrically conductible)	Caster with brake	■
Suction Tube	piece(s) × m	1 × 1 / Metal	Dust class	H
Filter bag	Fleece		Safety filter set	■
Wet and dry floor tool	mm	360		
Crevice nozzle	■			
Antistatic system	■			
Stainless steel container	■			
Flat pleated filter	Fibreglass			
Metal bend	■			
Push handle	■			
Safety class	I			

■ Included in delivery.

NT 75/1 ME EC H Z22

1.667-239.0




		Order Number	Anzahl	Dummy	Dummy	Dummy	Price	Description	
Flat pleated filter HEPA, dust class H									
HEPA surface filter	1	6.904-364.0	1 piece(s)					HEPA surface filter, dust class H (H 14).	■
Safety filter sets / sacks									
Safety filter bags	2	6.904-420.0	5 piece(s)						■

■ Included in delivery. □ Available accessories.

NT 75/1 ME EC H Z22

1.667-239.0

KÄRCHER

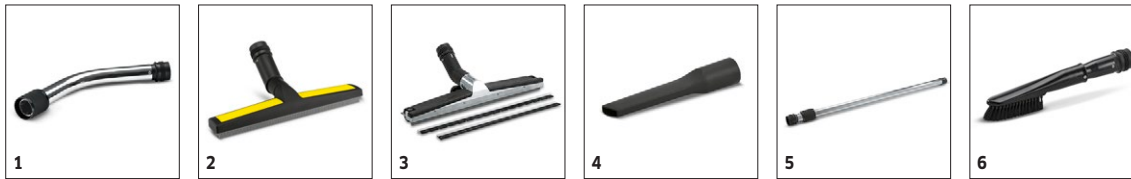

		Order Number	Anzahl	Nennweite	Länge	Breite	Price	Description	
Bend metal									
Metal bend, ID 40	1	4.036-032.0	1 piece(s)	40				Non-interchangeable bend DN 40 for B1 M safety vacuum cleaners.	■
All-purpose nozzles (wet/dry)									
Wet and dry floor tool DN 40	2	4.763-244.0	1 piece(s)	40		360 mm		All-purpose plastic nozzle (DN 40) with 360 mm working width. With side rollers. Brush strips (6.905-878.0) and squeegee blades (6.905-877.0).	■
All-purpose nozzle, ID 40	3	4.130-399.0	1 piece(s)	40		450 mm		Aluminium floor nozzle, earthed, non-interchangeable, 370 mm, height adjustable.	□
Crevice nozzles									
Crevice tool ID 40	4	4.763-243.0	1 piece(s)	40	290 mm			Plastic, non-interchangeable.	■
Suction tubes metal									
Suction tube, DN 40, 1 m	5	4.025-372.0	1 piece(s)	40	1000 mm			Metal chromium-plated - non-interchangeable with screw connection. Only suitable for use with NT 80/1 B1 M and NT 80/1 B1 MS or NT 801 B1 M/MS.	■
All-purpose brushes									
All-purpose brush, DN 40, B1	6	4.763-242.0	1 piece(s)	40	120 mm			Natural bristles (cow hair), bristle attachment 120 x 45 mm, non-interchangeable screw connection.	□

■ Included in delivery. □ Available accessories.

NT 75/1 ME EC H Z22


1.667-239.0



		Order Number	Anzahl	Nennweite	Länge	Price	Description	
Suction hoses complete								
Suction hose complete Z22	1	4.440-991.0	1 piece(s)	40				<input checked="" type="checkbox"/>
Suction hose complete B1 M L=8m	2	4.440-013.0	1 piece(s)	40	8 m			<input type="checkbox"/>

Included in delivery.
 Available accessories.

NT 75/1 ME EC H Z22 1.667-239.0



		Order Number	Flow Rate	Water feed temperature	Length	Length	Price	Description	
Teleskopstangen									
Telescope lance hybrid 10 m	1	4.762-611.0		max. 60 °C					<input type="checkbox"/>
Telescope lance carbon 10 m	2	4.762-612.0		max. 60 °C					<input type="checkbox"/>
Adapter set	3	9.751-306.0							<input type="checkbox"/>

■ Included in delivery. □ Available accessories.